


Angle Needle Valves Screwed Bonnet Design

Model No. ANVN

Designed for use in applications for throttling purpose and straight shut off of liquids, gas or vapour service. These needle valves are available with a variety of end connections and stem packing.



Description

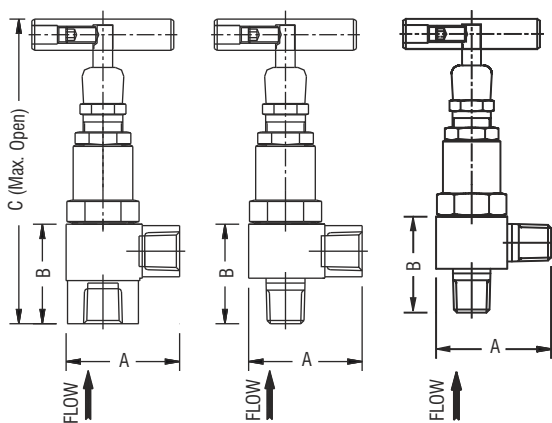

Test Pressure	@ 25°C Room Temperature Hydrostatic : Body - 415 bar(g) Seat - 415 bar(g) Pneumatic : Seat - 7 bar(g)
Gland Packing	PTFE : Standard Graphoil : Temperatures above 200°C
Material	A105, A 479 304, A 479 316, A182 GR F 316, Monel, Hastelloy, Duplex
Finish	CS zinc plated. SS Natural

Connections

(INLET x OUTLET)	A	B	C	PART No.
1/4" MNPT x 1/4" MNPT	45	39	116	G4 AMNVN
1/4" FNPT x 1/4" FNPT	45	39	115	G4 AFNVN
1/4" MNPT x 1/4" FNPT	45	39	115	G4 AM/FNVN
3/8" MNPT x 3/8" MNPT	45	39	116	G6 AMNVN
3/8" FNPT x 3/8" FNPT	45	39	115	G6 AFNVN
3/8" MNPT x 3/8" FNPT	45	39	115	G6 M/FNVN
1/2" MNPT x 1/2" MNPT	50	50	126	G8 AMNVN
1/2" FNPT x 1/2" FNPT	50	50	128	G8 AFNVN
1/2" MNPT x 1/2" FNPT	50	50	128	G8 AM/FNVN

Note: Also available with BSP and BSP taper thread connections bigger pipe connections on request.

Note: Drawings, Dimensions and other information are subject to change without notice, as a part of our continues research and development.