

# Three Valve Manifold, Separately Mounted

## Model No. G3 VMPP1

Designed for applications to facilitate remote mounting of differential pressure instruments. Dimensions shown above are for the standard 54 mm or 2 1/8 inch instrument connection. Centre distance found in majority of instruments.


The manifold is also available for instruments with other centre distances for instrument connections (as 55 mm, 56 mm and 57 mm) but dimensions shown will vary.

Please consult us for these dimensions. Useful for installations in remote fields eliminating conventional method of piping.



**Valve on three sides with screwed connections**

## Description

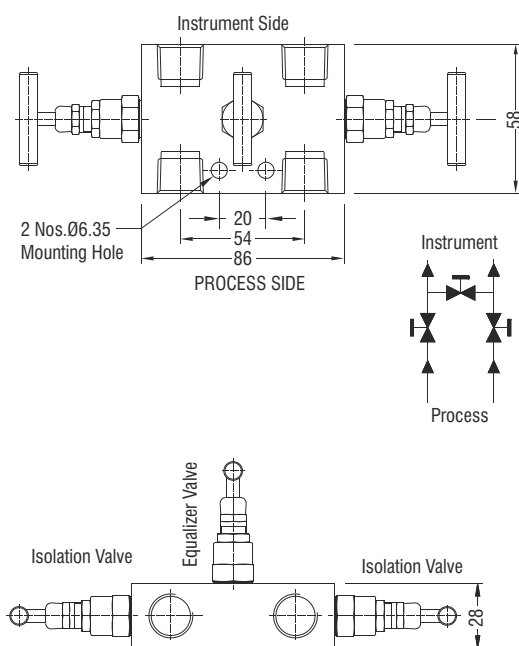

<b>Connections</b>	Process : 1/2" NPT (F) Instrument : 1/2" NPT (F) Drain/Vent : 1/4" NPT (F) (Optional)
<b>Test Pressure</b>	@ 25°C Room Temperature Hydrostatic : Body - 415 bar(g) Seat - 415 bar(g) Pneumatic : Seat - 7 bar(g)
<b>Gland Packing</b>	PTFE : Standard GRAPHOIL : Temperatures above 200°C
<b>Material</b>	A 105, A 182 GR F 304, A 182 GR F 316, Monel, Hastelloy, Duplex
<b>Finish</b>	CS zinc plated. SS Natural
<b>Option</b>	Drain Port on instrument side with drain plug (Dimension 58 becomes 76) Test Port on process side with plug
<b>Accessory</b>	Mounting Bolts - IS : 1364 - 1960 - 2 Nos

**Note:** Also available with BSP and BSP taper threads.

**Note:** Drawings, Dimensions and other information are subject to change without notice, as a part of our continues research and development.