


# Two Valve "T" Type Manifold for Pressure Instruments




## Model No. G2 VMPF1

Two valve manifold is designed in a single block with female screwed inlet and outlet port combining isolation valve and vent / calibration valve. Generally used on static pressure transmitters, switches or gauges.

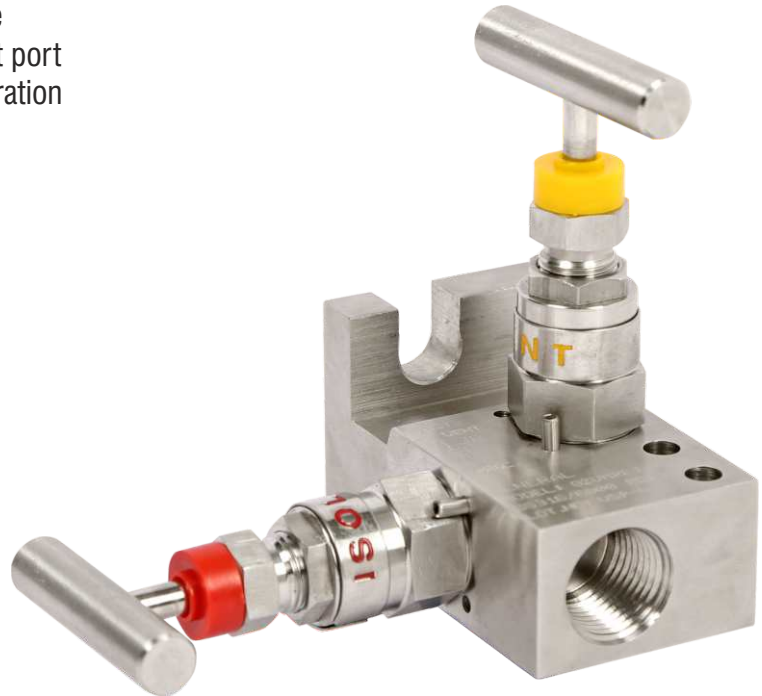

## Description

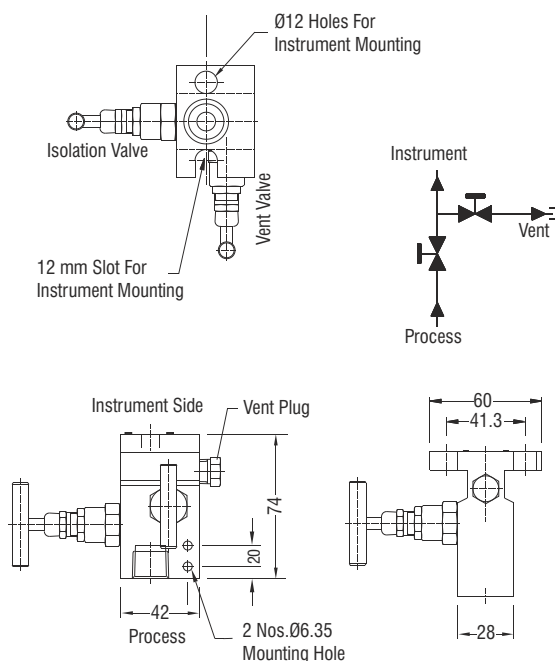

<b>Connections</b>	Process : 1/2" NPT (F) Instrument : Flanged Drain/Vent : 1/4" NPT (F)
<b>Test Pressure</b>	@ 25°C Room Temperature Hydrostatic : Body - 415 bar(g) Seat - 415 bar(g) Pneumatic : Seat - 7 bar(g)
<b>Gland Packing</b>	PTFE : Standard GRAPHOIL : Temperatures above 200°C
<b>Material</b>	A 105, A 182 GR F 304, A 182 GR F 316, Monel, Hastelloy, Duplex
<b>Finish</b>	CS zinc plated. SS Natural
<b>Option</b>	Drain Plug
<b>Accessory</b>	Mounting Bolts - IS : 1364 - 1960 - 2 Nos Interface seal - PTFE / VITON - 1 Nos

**Note:** Also available with BSP and BSP taper threads.

**Note:** Drawings, Dimensions and other information are subject to change without notice, as a part of our continues research and development.