

Solid Front - Bourdon Sensing Pr. Gauges



MODEL : SFBSPG (Dry Case)
LSBSPG (Liquid Filled Case)

Features

- Safety pattern
- All SS construction
- These Pressure Gauges are well suited for the Process Industries such as Chemicals, Petro-chemicals, Energy or Gas industry, Food processing, Nuclear etc.
- These Gauges have been provided with a solid baffle wall and blow out back which immediately releases the pressure in the enclosure in the event of an accidental rupture of the sensing element.



Specifications

Ref. standard	EN 837
Dial	100 mm /150 mm, Aluminium, white background, black markings
Case	SS304 / SS316 with bayonet bezel
Protection	Weatherproof to IP-68 (IS:13947 part I / IEC:60529)
Window	Safety glass (Shatter proof / Toughened glass)
Bourdon	SS316, SS316 Ti, SS316L, Monel
Socket	22 mm Square in SS 316, SS316L, SS316 Ti, Monel
Movement	SS304, SS316
Range	As per EN 837 (refer table) minimum span 0.6 kg/cm ² , maximum 1600 kg/cm ² g
Connection	1/2" NPT (M) as standard* (other optional**)
Accuracy	±1% FSD (0.5% on request)
Over range	As per EN 837
Zero adjustment	Micrometer Pointer
Blow out disc	Provided at back of Case
Temperature suitability	Ambient (-)20°C to 60°C, Media 200°C
Temperature Effect	Within ±0.4% FSD/10°C, when temperature changes from reference temperature of 20°C (as per EN-837 standard)
Optional	NACE compliance Liquid filled case External Knob for zero setting IBR Certification Vacuum Protection CE Atex

* For ranges above 1000 bar, connection shall be 1/2"BSP(M) with Bottom Entry only

** Autoclave connection available on request

Ranges

Gauge	bar, kg/cm ²	Least count	
Vacuum	(-)1 to 0	0.02	
	-760 to 0mmHg	20	
Compound (‘C’ shaped Bourdon)	(-)1 to 0.6	0.05	
	(-)1 to 1.5	0.05	
	(-)1 to 3	0.10	
	(-) 1 to 5	0.10	
	(-)1 to 9	0.20	
	(-)1 to 15	0.50	
	(-)1 to 24	0.50	
	(-)1 to 39	1.0	
	Pressure Gauge	0 to 0.6	0.01
		0 to 1	0.02
0 to 1.6		0.05	
0 to 2.5		0.05	
0 to 4		0.10	
0 to 6		0.10	
0 to 10		0.20	
0 to 16		0.50	
0 to 25		0.50	
0 to 40		1.0	
Pressure Gauge Coil type Bourdon	0 to 60	1.0	
	0 to 100	2.0	
	0 to 160	5.0	
	0 to 250	5.0	
	0 to 400	10.0	
	0 to 600	10.0	
	0 to 800	20.0	
	0 to 1000	20.0	
	0 to 1600	50.0	
	0 to 2000	50.0	
0 to 2500	50.0		


For range other than above please contact our design dept.

The parameters mentioned here are the standard specifications / values generally used for most of the process applications. Any other specification not appearing here also can be provided as per customer requirement. For higher temperature services above 100°C, we recommend to provide suitable cooling arrangement (Syphon, Cooling Tower, Impulse Tubing, Diaphragm Seal etc.)

Under Technical Collaboration with M/s. Gauges Bourdon, France

Ordering Information

MODEL

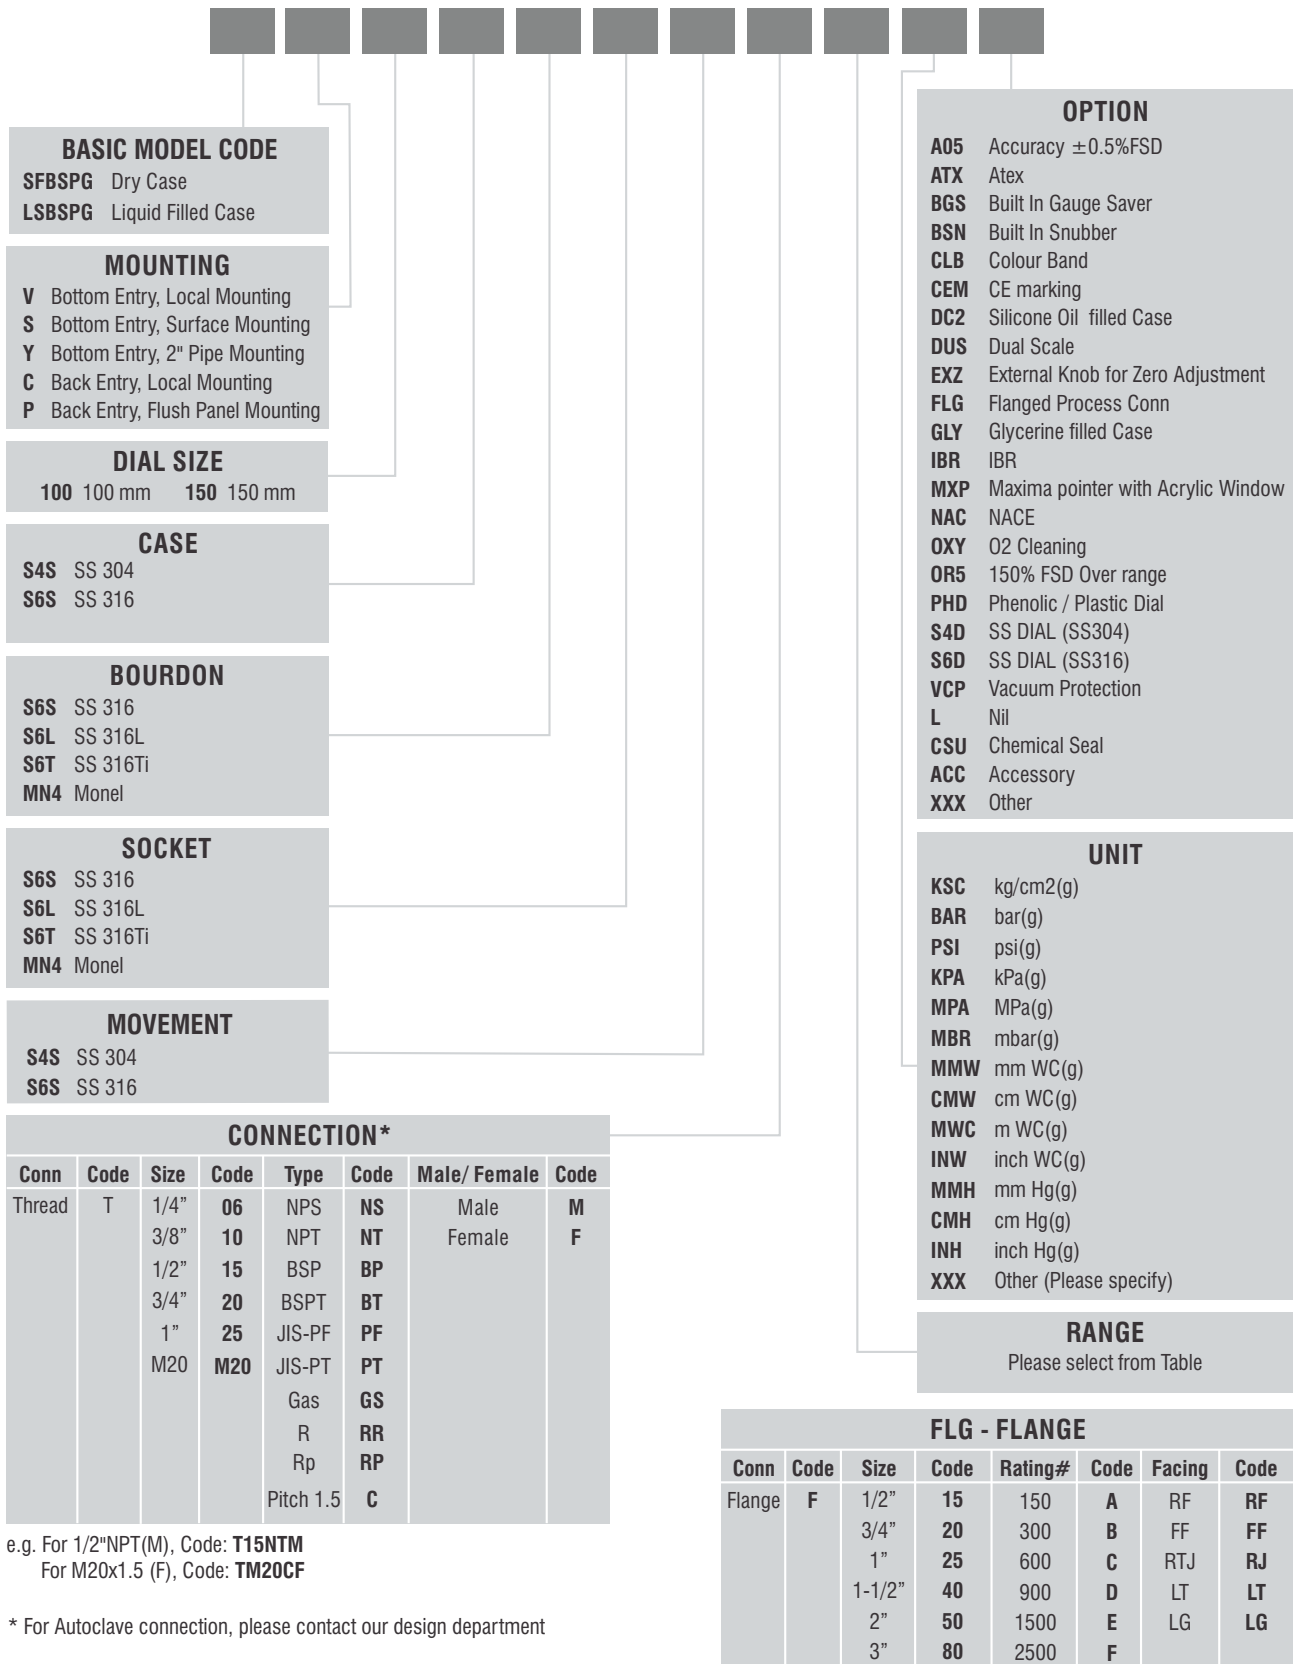

Sample Model Code: **SFBSPG-V-150-S4S-S6S-S6S-S4S-T15NTM-(0-10)-BAR-OXY**