

Accessories



MODEL : ACC-FRG

Flushing Rings

During installation, the Flushing Ring (Spacer Ring) is sandwiched between the process flange and the diaphragm seal. The purpose of Flushing Ring is to avoid the formation of solid deposits below the Diaphragm and thus avoid the clogging. 2 holes with internal threads provided on the ring facilitate the purging / cleaning of the area below the diaphragm, without removing the Seal from the process line. At normal conditions the female ports of the ring shall be plugged.


Generally available materials are SS304, SS316, SS316L, Nickel, Monel, Hastelloy-C, Titanium etc (other material on request)



Ordering Information

When ordered with Diaphragm Seal Gauges, the ordering information is already covered in Option Column of Model Codes for Diaphragm Seal.

When ordered at a separate Item, the ordering Information shall be as follows:

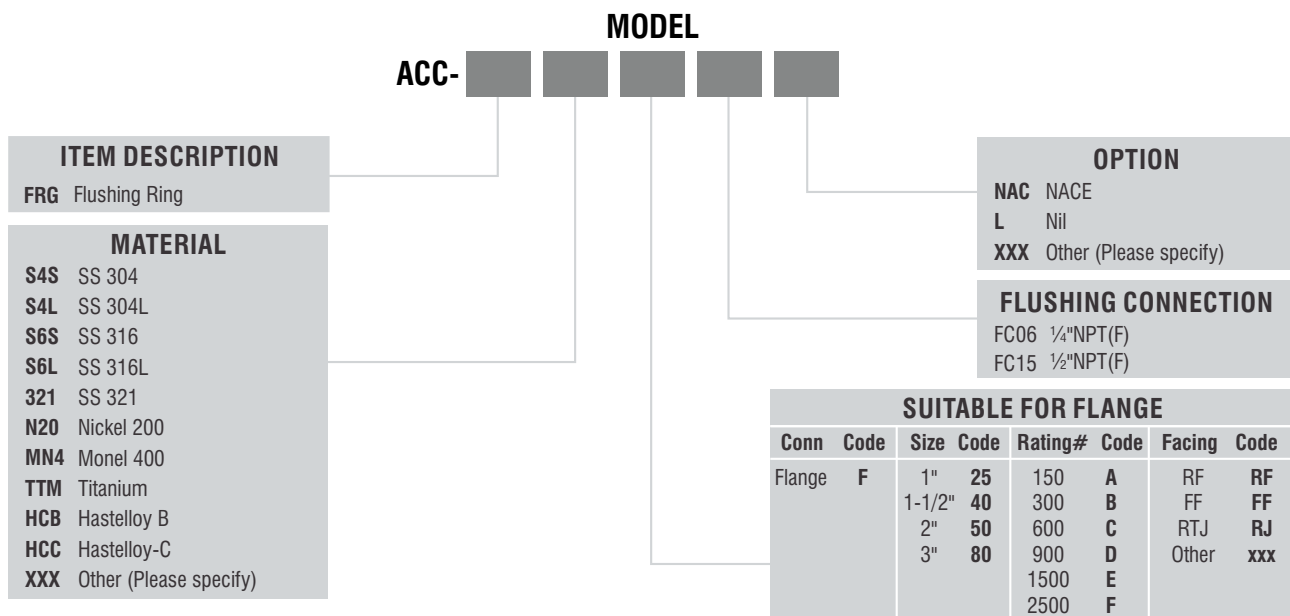

Note: This catalogue indicates the general specifications used for most of the process applications. Any other specification not appearing here also can be provided as per customer requirement.

Sample Model Code: ACC-FRG-S6S-F50BRF-FC15-L