


Two Valve Manifold


Model No. G2 VMPTM1

Two valve manifold is designed in a single block with female screwed inlet and outlet port combining isolation valve and vent / calibration valve. Generally used on static pressure transmitters, switches or gauges.

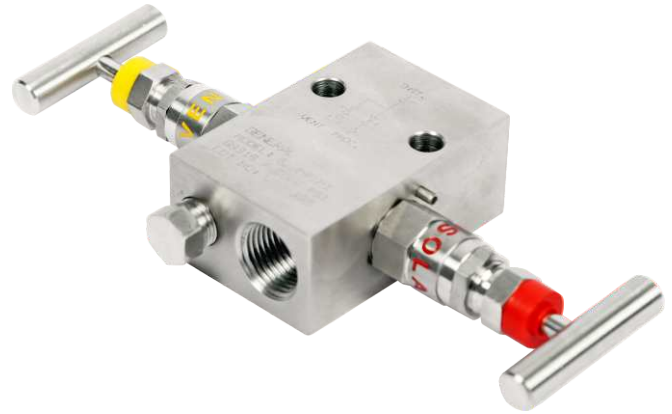

Isolation & vent valve opposed and drain on process side

Description

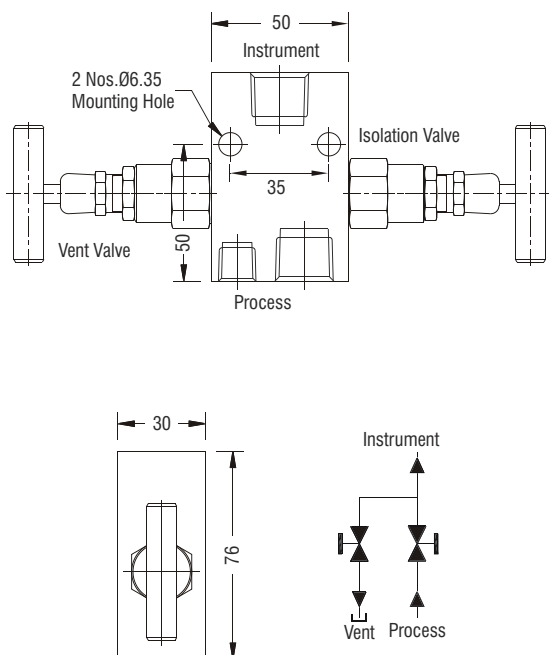

Connections	Process : 1/2" NPT (F) Instrument : 1/2" NPT (F) Drain/Vent : 1/4" NPT (F)
Test Pressure	@ 25°C Room Temperature Hydrostatic : Body - 415 bar(g) Seat - 415 bar(g) Pneumatic : Seat - 7 bar(g)
Gland Packing	PTFE : Standard GRAPHOIL : Temperatures above 200°C
Material	A 105, A 182 / A 479 GR F 304, A 182 / A 479 GR F316, Monel, Hastelloy, Duplex
Finish	CS zinc plated. SS Natural
Option	Drain Plug. Three piece union for gauge positioning
Accessory	Mounting Bolts - IS : 1364 - 1960

Note: Also available with BSP and BSP taper threads.

Note: Drawings, Dimensions and other information are subject to change without notice, as a part of our continues research and development.